
MULTI SPLIT CASSETTE unit with round-way airflow

Heiko cassette air conditioners are a great solution for installation in the home, office, or restaurant. The range includes units with different capacities to match the size of the building area. The cassette air conditioners are available with a perimeter airflow panel. Heiko units are unobtrusive, installation-friendly and will blend in well with any décor.

TEMPERATURE SETPOINT from 16 to 30°C



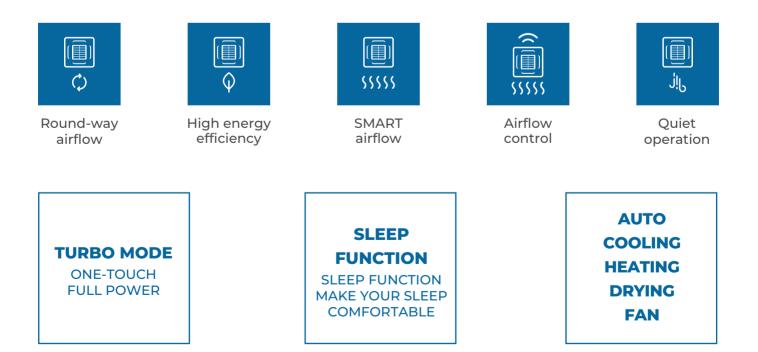

Indoor unit		Wireless controller R-NRS01 (standard)	Wired controller R-C01 (standard)
Indoor unit			CA070-A1
Capacity	Cooling	kW	7.1
	Heating	kW	8
Electrical parameters	Power supply	f/V/Hz	1/220-240/50/60
Performance	Airflow	m³/h	1260/1070/820/680
	Sound power level	dB(A)	55
	Sound pressure level	dB(A)	36/33/29/26
Installation	Package dimensions (W/D/H)	mm	840/840/204
	Dimensions with packaging (W/D/	H) mm	990/990/310
	Net/gross weight	kg	27/31
	Liquid pipe diameter	mm	9,52
	Gas pipe diameter	mm	15,88
	Controller	Wireless option	YR-NRS01
		Wired option	YR-C01
Cover	Туре	Option	PB-950HE4
	Package dimensions (W/D/H)	mm	950/950/50
	Dimensions with packaging (W/D/	H) mm	1000/1000/110
	Net/gross weight	kg	6.5/9