


HEAT PUMPS

POOL

Swimming pool pump

Heiko POOL heat pumps are devices that can be connected directly to the technological circuit of pool water. They are installed near the pool and can be used for both heating and cooling water. The heat pumps are equipped with a condenser that is resistant to chlorinated water and salt water. They feature a panel that allows simple and quick control. Heiko POOL heat pumps are the ideal solution not only for home pools, but also for all places that require accurate and precise maintenance of water temperature.

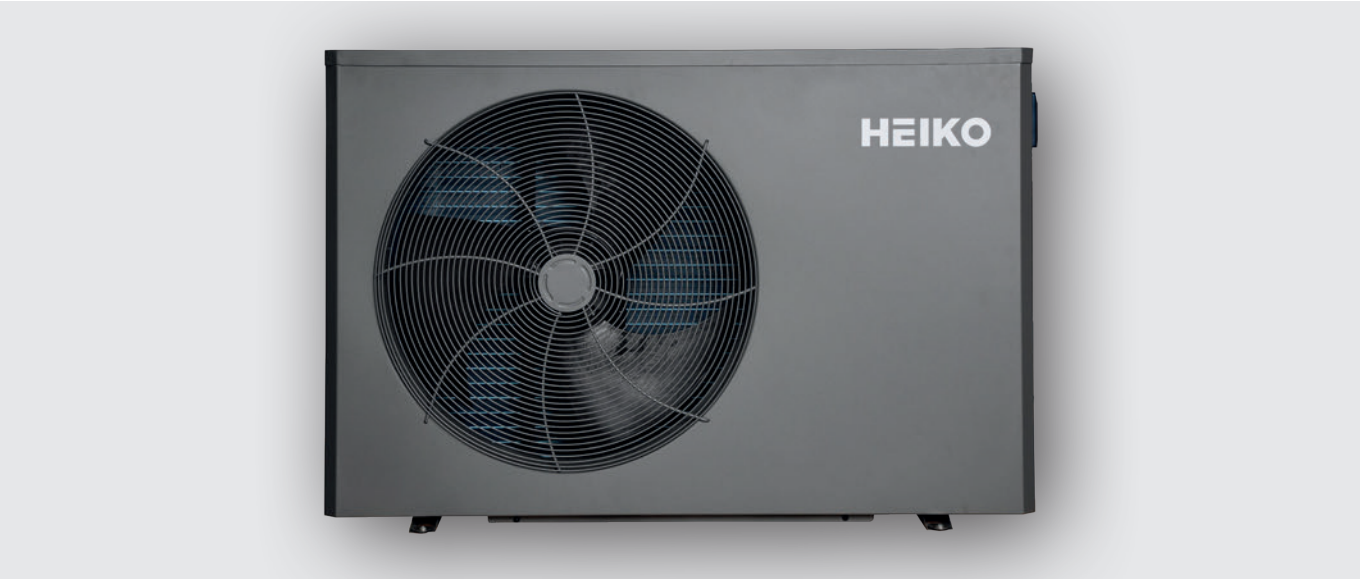

R32
refrigerant



Smart
controller



Low power
consumption



Heat pump can be
controlled by the app

CONDENSER
RESISTANT
AGAINST
CHLORINATED
AND SALT
WATER

DIRECT
CONNECTION TO
WATER PROCESSING
CIRCUIT



Model			HEIKO POOL 5	HEIKO POOL 7	HEIKO POOL 9	HEIKO POOL 11	HEIKO POOL 15
Outdoor sound power level		dB(A)	50	51	52	54	54
Special precautions			See the Installation and Service Manuals before attempting the installation				
Power supply		V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
Air temperature 26°C/Water temperature 26°C	Capacity	kW	7,2	9,5	13,0	14,7	19,8
	COP	-	13,6	14,0	16,4	16,5	16,7
Air temperature 15°C/Water temperature 26°C	Capacity	kW	5,4	6,7	8,7	10,8	14,7
	COP	-	6,5	6,6	7,8	7,7	7,9
Current protection control		A	16	16	20	20	25
Power supply of the electric heaters		mm ²	3 x 2,5	3 x 2,5	3 x 2,5	3 x 4	3 x 4
Dimensions of the outdoor unit (W x H x D)	Net/gross		848x375x643/ 888x396x798	848x375x643/ 888x396x798	848x375x643/ 888x396x798	932x375x643/ 968x396x798	1129x395x743/ 1166x416x898
Outdoor unit weight		kg	41,5 / 45	43 / 47	47,5 / 52	54,5 / 59	68 / 72
Compressor	Typ		Hermetic Rotary DC Inverter Compressor				
Max pool volume (m3)*			15~30	22~43	30~56	34~68	45~85
Compressor manufacturer			GMCC	GMCC	GMCC	MITSUBISHI	GMCC
Refrigerant	Type/amount of gas	kg	R32 / 0,45	R32 / 0,45	R32 / 0,6	R32 / 0,65	R32 / 1
Expansion valve			Electronic				
Recommended operating range	Cooling	°C	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43
	Heating	°C	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43	-7 ~ 43
Water side heat exchanger	Type		Titanium heat exchanger				
Water-side connection	Type	mm	PVC 50				
Outlet water temperature range	Cooling	°C	15 ~ 40	15 ~ 40	15 ~ 40	15 ~ 40	15 ~ 40
	Heating	°C	8 ~ 28	8 ~ 28	8 ~ 28	8 ~ 28	8 ~ 28

* Calculated for an in-ground private swimming pool covered with a bubble cover.